


UGR<13

BACKLIGHT LOUVRES REFLECTOR DESIGN

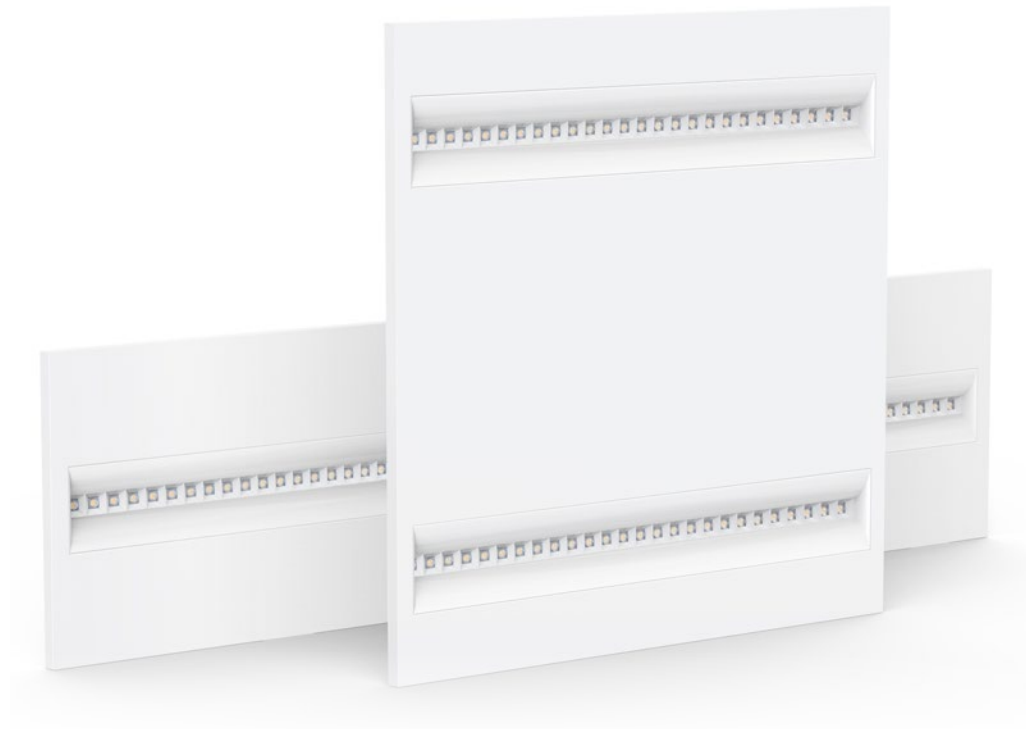

Backlight Louvres Reflector Design biedt de ideale combinatie van stijlvolle design en optimale prestaties voor zowel taak- en algemene verlichting. Zorgt voor een optimale lichtverdeling en volledige schittering controle met inachtneming van de nieuwste office-verlichting (UGR < 13).

Speciaal voor op kantoor, scholen en ruimtes waar men een zeer lage UGR-waarde verwachten.

TOEPASSINGEN

Industrieel | Werkplaats | Magazijn | Fabriek | Warehouse

STRALINGSHOEKEN



120°

VERMOGEN



30W

KLEURTEMPERATUUR

3000
KELVIN

4000
KELVIN

5700
KELVIN

QueLED Backlight Louvres Reflector

SPECIFICATIES

LED	Product Code	QL110501 - QL110516
	LED Chip supplier	
	LED Type LED	side lit LED
	LED Quantity LED	
	Colour Temp. (K)	3000K 4000K 5700K
	Tolerance	±5%K
	SDCM	<5
	CRI (Ra)	>80
Power supply	Driver	built-out
	Driver Brand	
	Input Voltage	AC220-240V
	Frequency Range	50Hz-60Hz
	Wattage	30W
	Power Factor	0,9
	Ambient Temp	(-20°C ~ +45°C)
	Dimmable?	8% - 100%
Design Parameters	Size (mm)	6060: 595 x 595 x 54mm 30120: 1195 x 295 x 54mm
	Finish color	White RAL 9016
	Beam Angle	120°
	Lumen Output	3450 lm
	Luminous Efficiency	110 - 120 lm/w
	Tolerance	±5%lm
	Material	PC / Iron
	Light Design	stylish design and optimum performance
	IP rate	IP20
	IK rate	
	Certificate	
	Lifetime	40,000 hrs
	Junction Temperature	
	Working temperature	-20°C ~ +45°C
	Storage temperature	-20°C ~ +65°C
Packing information	Installation type	Recessed
	Packaging Lamp body	